


EZO TAPE



SIZE	Available in widths of 1", 1.5", 2" Rolls are 50m in length
SKU	DST-010, DST-015, DST-020
CAPACITY	ezo tape is intended for use with ezoBord sheets on approved substrates. Improper application or insufficient coverage may cause product failure.

Steps to avoid tape failure:

-Ensure sufficient presure was applied at time of installation.

Complete adhesion does not happen without burnishing tape to ezo and tape to application surface.

-Some substrates are not porous enough for tape to adhere properly. High sheen paint requires scuff sanding prior to application.

-It is recommended to use a construction grade adhesive in addition to ezo tape. The tape will assist in holding the product in place while the adhesive cures. -Ensure surface is clean and free from dust and lint.

-Prolonged exposure to UV may deteriorate the tape both before and after application.

-ezo tape is intended for use on vertical surfaces. Horizontal applications (ceilings) may require construction grade adhesive or additional hardware.

-Avoid storing or applying tape in extreme temperatures.


-Occassionaly ezo sheets have one side that is smoother. It is recommended to apply tape to the rougher of two sides.


Thank you for your order!

For questions or concerns regarding your order or installation please contact your local customer service. Canada: 1-844-441-1122 or sales@ayrsonics.com USA: 1-844-441-1122 or info@usa.ayrsonics.com


www.ezobord.com

EZO TAPE

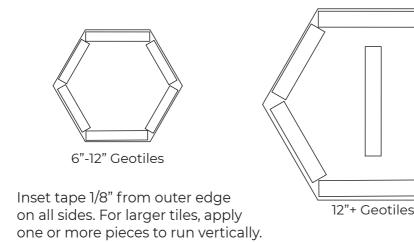

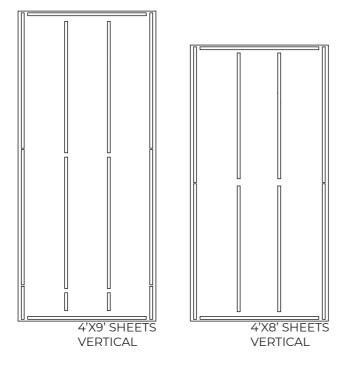

Apply tape to run vertically when applied to wall surface. Tape should be spaced 12" for 12mm material, and 16" for 9mm material. Inset tape 1/8" from outer edge on all sides.



4'X8' SHEETS HORIZONTAL

Recommended Tools Utility Knife Roller

